


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

In 1882, under Contract No. 451, Rufus S. Moore set a stone, 18x12x8, from which a 36" Pine bears N43°E, 16 lks. and a 12" Pine bears N87°W, 58 lks.

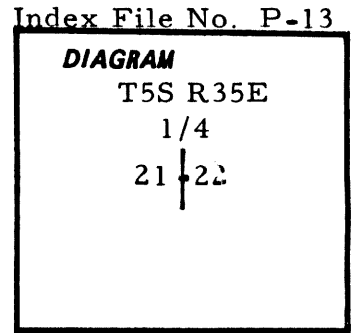

Description of corner evidence found:

Found original stone 18x12x8, marked '1/4' .
Bearing trees found:
31.5" P. Pine bears N43°E, 10.6 ft., healed blaze.
30" Pine stump bears N87°W, 38.3 ft., blazed & scribed: " T ".

Description of monument and accessories | established to perpetuate the original location of this corner:

Set corner from evidence.
Set 2.5" aluminum cap on 2.5x30" aluminum pipe rising 12" in mound. Buried original stone on North side. Set steel fence post and sign 54-9 3.0 ft. north of corner.
New BT:
15.5" P. Pine bears N68°W, 61.8 ft., blazed and scribed: '1/4 S21 BT.

Cap is stamped:


T5S R35E
1/4
S21 | S22
RLS 1844
1985

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Brass disk stamped "LS 1844" nailed to lower end of blazes.

Corner is on northeast slope in open timber. Take Road 5155 to 5155-050 to Road 5155-052. Corner is S50°W, 100 ft. from end of road.

Compass Declination: 19 1/2°E
Witness: Bernie Sutton

I hereby certify the above described corner monument and/or accessories was established as described on April 11, 1985.

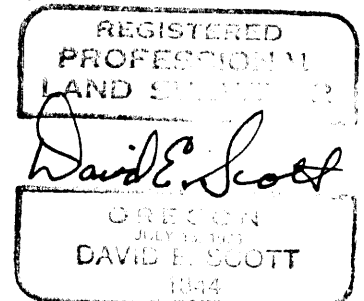

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	9-18-85
Date Filed	9-23-85
By	G. LANGLITZ, DEPUTY
File No.	58-85 R