


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. R-07

History of original corner establishment:

In 1882, under Contract No. 481, Rufus S. Moore set a post, from which a 7" Pine bears S8°E, 54 lks., and an 8" Pine bears N67°E, 63 lks.

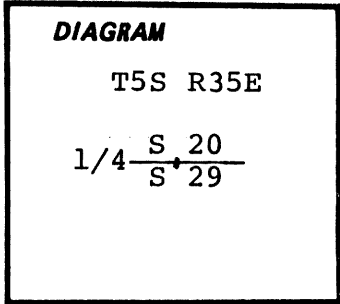

Description of corner evidence found:

No corner evidence found.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

T5S R35E

Corner set by single proportioning.

1/4 $\frac{S}{S} \frac{20}{29}$

Set 2.5" aluminum cap on 2"x30" aluminum pipe rising 10" above ground. Set steel fence post 3.0 ft. north of corner.

RLS 1844
1984

New BT's:

A 7" L. Pine bears S56.5°E, 7.6 ft., blazed and scribed: 1/4 S29 BT.

A 6" L. Pine bears N39°E, 12.0 ft., blazed and scribed: 1/4 S20 BT.


Attached brass disk stamped LS 1844 to base of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Corner is found on south slope S40°E, 500 ft, more or less from the most southeast cabin at Blue Spring.

Compass Declination: 19 1/2°E

Witness: Jeff Sheets

I hereby certify the above described corner monument and/or accessories was established as described on November 7, 1984.

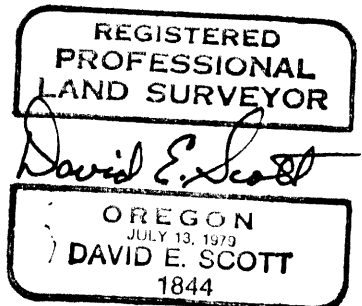

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

