


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
None

Index File No. X-15



Description of corner evidence found:
None

Description of monument and accessories I established to perpetuate the original location of this corner:

Cap is stamped:

Set 2 $\frac{1}{2}$ "x30" aluminum capped aluminum pipe rising 6" in mound of stones and earth.
Set steel fencepost 3' north of corner.

T5S R35E
C $\frac{1}{4}$ •S34
RLS 1848
1986


New BT's:

A 21 $\frac{1}{2}$ " leaning L. Pine bears S15 $\frac{1}{4}$ °W, 79.8 ft., blazed & scribed: C $\frac{1}{4}$ S34 BT
A 5" L. Pine bears S56°E, 268.2 ft. blazed & scribed: C $\frac{1}{4}$ S34 BT

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 $\frac{1}{2}$ °E
Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug 10, 1986.

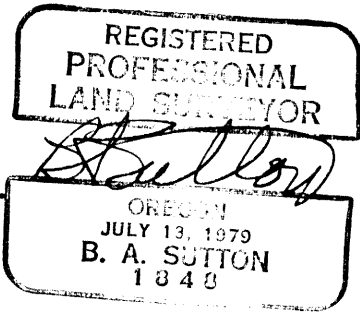

UNION COUNTY SURVEYOR
Date Received 8-26-86
Date Filed 9-10-86
By G. LANGLITZ DEPUTY
File No. 131-86 R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

SEE SURVEY 27-86