CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This section corner was set by deputy surveyor Timothy W. Davenport, under Contract No. 102, dated July 20, 1863. He states he set a post for the corner to Sec's 6, 7, 1 and 12; made mound of earth and drove charred stake as per instructions.

DIAGRAM

T 5 S
R 38 E R 39 E

S 1	S 6
S 12	S 7

1987
ORLS 645

Description of corner evidence found:

At the assumed section corner location I found a mound of earth and small stone along side a large rock jack at an ancient fence corner. No other evidence was available.

Description of monument and accessories I established to perpetuate the original location of this corner:

With no other evidence existing and the corner position appears to be correct by survey, I accepted the center of the mound as being the true corner location. I then set an Alum cap on a 2" x 30" pipe, with a magnet fixed in the cap, at the corner location. I buried the pipe to within 8" above the surface of the ground. I then placed a mound of stone 4 feet dia. and 1 foot high covering the monument. There were no bearing trees available in the vicinity of this section corner.

UNION COUNTY SURVEYOR

Date Received 9-22-87

Date Filed 9-25-87

By G. LANGLITZ, DEPUTY

File No. 109-87 R

REFER TO SURVEY 28-87

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton

9-25-87

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... *by* .....

(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆GPO—798-276

E-1

11

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner established by Timothy W. Davenport, under GLO Contract number 102, dated July 20, 1863.
Surveyor General record states:

Set post for corner to Secs. 6, 7, 1 and 12 on the East slope of ridge about 20.00 West of road; made mound of earth and drove charred stake as per instructions

James Hambleton in Survey Number 28-87 finds a mound of earth and small stone along side a large rock jack. He monuments the location with a 2" x 30" aluminum pipe in a mound of stone, 4 ft. dia and 1 ft. high, with aluminum cap marked as shown in Union County monumentation record 109-87R.

No record of subsequent monumentation found in UNION COUNTY survey records.

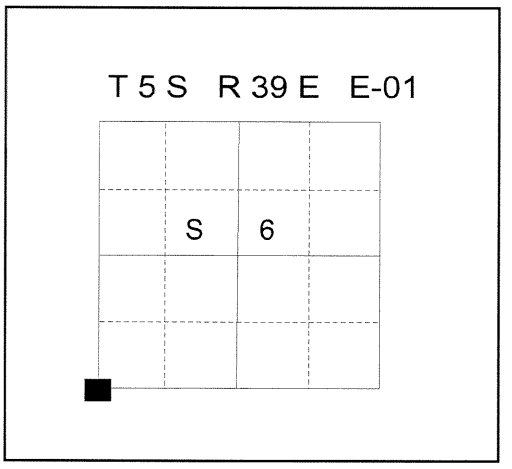

DESCRIPTION OF CORNER EVIDENCE FOUND:
Found 2 ½" aluminum pipe with aluminum cap marked as shown below, in mound of stone 3 ft. dia. 1 ft. high.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:
At the position of the found pipe;

NEW BEARING OBJECTS:
A 5/8"X 30" rebar with 1 ½" aluminum cap bears North 83° East, a distance of 7.60 feet, marked "UNION COUNTY SURVEYOR NE RP".
A 5/8"X 30" rebar with 1 ½" aluminum cap bears South 10° East, a distance of 18.20 feet, marked "UNION COUNTY SURVEYOR SE RP".
A 5/8" X 30" rebar with 1 ½" aluminum cap bears South 66° West, a distance of 11.85 feet, marked "UNION COUNTY SURVEYOR SW RP".
A 5/8"X 30" rebar with 1 ½" aluminum cap bears North 2° West, a distance of 11.25 feet, marked "UNION COUNTY SURVEYOR NW RP".

Corner falls 1 foot North of a fence corner post on the West side of an existing fenceline. Fencelines runs North and East from fence corner.

I hereby certify that the corner was perpetuated on January 11, 2012.
Witness: Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR
OREGON
July 17, 1986
RICK G. ROBINSON
2219
Renewal Date: December 31, 2012

T5S
R38E R39E
S 1 S 6
S 12 S 7
1987
ORLS 645

UNION COUNTY SURVEYOR
Date Received 1/25/2012
Date Filed 1/27/2012
Filed By Gregory T. Blair
File Number 002-2012R

I used a steel tape and magnetic compass to establish the accessories. Magnetic declination used was 16° East. The distances to the rebar accessories are to the center of the aluminum cap.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201201

SECTION CORNER COMMON TO SECTIONS: 1, 6, 7 and 12

TWP. 5 S. RGE. 38//39 E.

DATE TIED: January 11, 2012

SURVEYOR: RICK G. ROBINSON
OPLS 2219

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COORD: NAD 83(91)

LAT: 45 ° 9 ' 5.199562 " N

LONG: 117 ° 59 ' 37.76560 " W

SP. COOR: NAD 83(91)

N: 551334.037 INT FT.

E: 8848525.084 INT FT.

THETA: 1 ° 46 ' 38.4424763 "

SCALE FACTOR: 0.9998946279

ELEV: 3786.86 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:
Corner is an aluminum cap monument marked as shown, 1 ft. North of fence corner with fences running North and East.

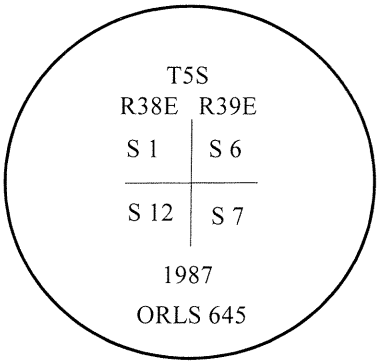

REGISTERED
PROFESSIONAL
LAND SURVEYOR
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2012

1 METER = 3.2808333333... US FEET = 39.37 INCHES
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)