


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

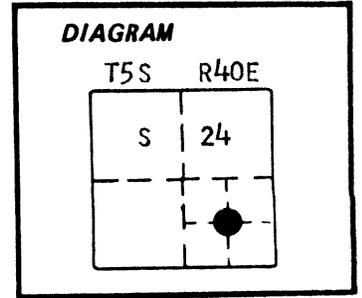

No record of subsequent remonumentation found in county records

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR

Date Received 6-5-86
 Date Filed 6-18-86
 By S. LANGRISH, DEPUTY
 File No. 61-86 R

See map of survey dated June, 1984


Description of monument and accessories established to perpetuate the original location of this corner: At position determined by survey, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground with mound of stone 4 ft. base to top of cap from which:

New BTs

- A 14 inch diameter White Fir bears N39°E 19.21 feet marked SE 1/16 S24 BT
- A 15 inch diameter Red Fir bears S15°E 32.90 feet marked X BT

Set steel fenceposts approximately 5 feet West with 54-2 sign and approximately 5 feet South with 54-2 and 54-9 signs attached

Corner set May 30, 1986
Witness: Greg Blackman

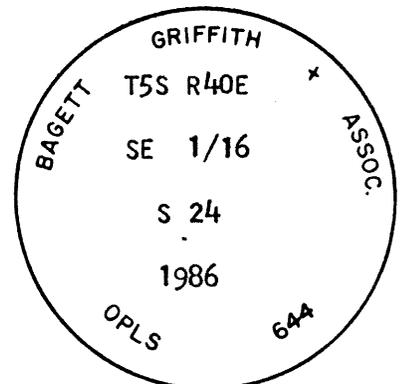

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by (DEPUTY)
 (COUNTY OFFICIAL)