


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by W. B. Barr under GLO contract number 492 dated August 22, 1883, Surveyor General record states: Set granite stone 15"x10"x8", 10 inches in the ground, marked 1/4 on the North face, from which:

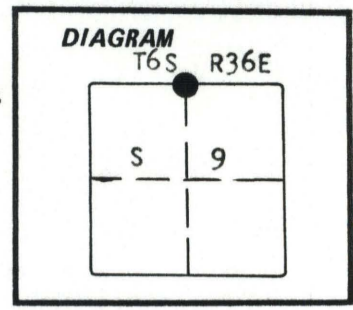

A Pine 36" in diameter bears N 10° E, 27 lks. distant, marked 1/4 S BT.

A Pine 48" in diameter bears S 30° E, 27 lks. distant, marked 1/4 S BT.

No subsequent record of remonumentation found in county record.
Description of corner evidence found:


Found a 32" Ponderosa Pine open blaze with scribes showing. Tree bears S 30° E, 27 lks. distant. Tree alive and vigorous.

Found a 22" Ponderosa Pine open blaze with scribes showing. Tree bears N 10° E, 27 lks. distant. Tree alive and vigorous.

Corner falls in a skid trail, no stone found at record bearing and distance.

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by record bearing and distance from bearing trees, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26" in the ground, and raised a mound of stone.

No new bearing trees taken.

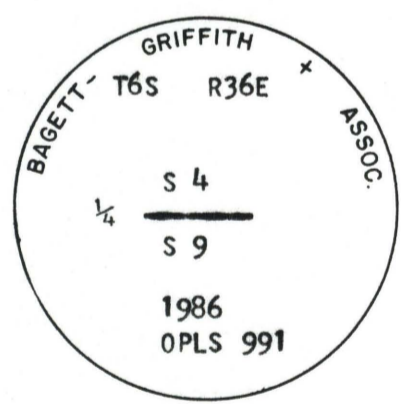

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

UNION COUNTY
SURVEYOR

Date Received 5-27-86
Date Filed 5-27-86
By G. LANGLITZ, DEPUTY
File No. 48-86 R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)