


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-11

History of original corner establishment: Corner established in 1883 by William B. Barr under Contract No. 492.

A 20x12x6 stone was set, from which:  
a 24" Tamarack bears N10°E, 110 lks., and  
a 36" Fir bears S15°W, 32 lks.

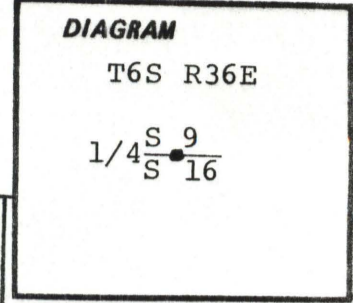

**UNION COUNTY SURVEYOR**  
Date Received 6-19-86  
Date Filed 6-19-86  
By G. LANGRISH, DEPUTY  
File No. 95-86 R

Description of corner evidence found:

Found original stone with 1/4 on it lying on top of the ground S50°W, 22 ft.

Bearing trees found:

14" W. Larch, dead & down, bears N10°W (original notes say N10°E) 110 lks, open blaze, faint scribing visible.

31" D. Fir, good condition, bears S15°W, 32 lks., partially opened blaze, faint scribing visible.

Description of monument and accessories established to perpetuate the original location of this corner:

Cap is stamped:

Set 2.5"x30" aluminum capped aluminum pipe rising 5" in mound of stones. Buried original stone along north side of cap. Set steel fence post 3 feet north of corner.

T6S R36E  
 $1/4 \frac{S}{S} \frac{9}{16}$   
RLS 1848  
1986

New BT:

12" D. Fir bears N6 3/4°E, 39.3 ft., blazed & scribed: 1/4 S9 BT.

Attached 3/4" brass washer marked LS 1848 to blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

To find corner: from the intersection of 5135 & 5135050, go east 700 ft. up the hill. Corner is on the northwest slope of a small knoll.

Compass Declination: 19 1/2°E

Witness: J. Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on June 3, 1986.

**REGISTERED PROFESSIONAL LAND SURVEYOR**  
*J. Sutton*  
OREGON  
JULY 13, 1979  
B. A. SUTTON  
1848

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)