CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO Contract Number 102, dated July 20 1863. Surveyor General field notes states:

Set post for corner to Secs 7, 18, 12 and 13. Made mound of earth and drove charred stake as per inst.

County Road petition 445, petition by S.C Mann calls road beginning at a point 20 rods South of said corner. Type of monument not specified.

T 6 S R 39 E J-01



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

SEE SURVEY NUMBER 011-2016

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the intersection of the Northerly extension of Gilkison Road centerline and Easterly extension of Wolf Creek Road centerline, I set a 2 1/2" x 30" aluminum pipe with 2 ½" aluminum cap, marked as shown below, 30 inches in the ground, from which:

NEW BEARING OBJECTS:

A 5/8" iron pin bears North 39°32' East, a distance of 27.15 feet, with 1 ½" aluminum cap marked UNION COUNTY SURVEYOR NE RP.

A 5/8" iron pin bears South 33°34' East, a distance of 57.77 feet, with 1 ½" aluminum cap marked UNION COUNTY SURVEYOR SE RP.

A 5/8" iron pin bears South 67°03' West, a distance of 26.99 feet, with 1 ½" aluminum cap marked UNION COUNTY SURVEYOR SW RP.

A 5/8" iron pin bears North 52°55' West, a distance of 40.32 feet, with 1 ½" aluminum cap marked UNION COUNTY SURVEYOR NW RP.

Set a steel fencepost approx. 0.5 ft. North of corner monument.

I hereby certify that the corner was monumented on March 28, 2016.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

UNION COUNTY SURVEYOR

T6S

R38E | R39E
S 12 | S 7
S 13 | S 18

2016
OPLS 83571

UNION COUNTY SURVEYOR

Date Received 3/28/16
Date Filed 3/28/16
Filed By
File Number 002-2016R

I used a Leica GS-15 RTK GPS system for establishment of the accessories. Basis of bearing is as per Survey Number 011-2016.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201603

SECTION CORNER COMMON TO SECTIONS 7, 12, 13 AND 18

TWP. 6 S. RGE. 38 -39 E.

DATE TIED: March 28, 2016

SURVEYOR: RICK G. ROBINSON
OPLS 2219

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COORD: NAD 83(91)

LAT: 45 ° 3 ' 0.65655 " N

LONG: 117 ° 59 ' 34.89104 " W

SP. COOR: NAD 83(91)

N: 514440.736 INT FT.

E: 8849876.355 INT FT.

THETA: 1 ° 46 ' 40.481078 "

SCALE FACTOR: 0.999896714

ELEV: 3487.11 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 ½" aluminum monument marked as shown at PI of County Roads

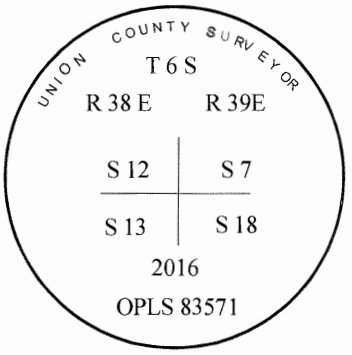

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2016

1 METER = 3.2808333333... US FEET = 39.37 INCHES
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)