


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

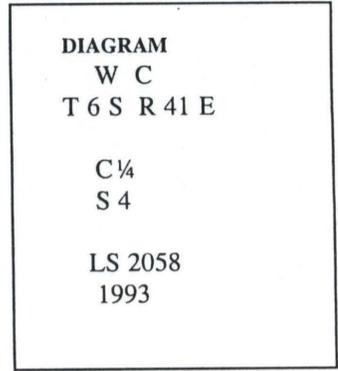

Description of corner evidence found:

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
*[Signature]*  
OREGON  
JULY 15, 1983  
RONALD E. STOLL  
2058

Description of monument and accessories I established to perpetuate the original location of this corner:

A monument could not be set at the actual corner position. At a point S.00°07'07"E, 73.59'. Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, with a mound of stone to cap, from which:

A fir, 14" diam., bears S.85°31'W., 37.54', scribed "WC C 1/4 S4 BT".

A fir, 16" diam., bears S.32°22'E., 16.47', scribed "WC C 1/4 S4 BT".

A cotton spindle on W. edge of rock cliff 2'± above ground in crack, bears N.75°42'E., 18.60'.

A drill hole in earth bound rock 3' x 2', 8" high, bears N.22°17'W., 11.01'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
SURVEYOR  
Date Received 10/28/98  
Date Filed 10/31/98  
By R. Robinson Deputy  
File No. 11B-1998R