


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

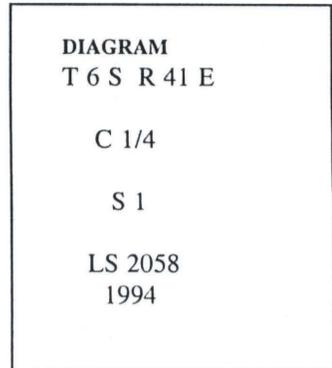

Description of corner evidence found:

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Ronald E. Stoll* 9/98

OREGON  
JULY 15, 1983  
RONALD E. STOLL  
2058

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 28" in the ground, with no mound of stone to cap.

A fir, 14" in diam., bears N.22°30'W., 83.4', scribed "C 1/4 S 1 BT".

A fir, 14" in diam., bears N.66°50'E., 26.6', scribed "C 1/4 S 1 BT".

A fir (dead), 14" in diam., bears S.25°40'E., 55.2', scribed "C 1/4 S 1 BT".

A fir, 15" in diam., bears S.63°20'E., 70.6', scribed "C 1/4 S 1 BT".

A "X" on the north face of a 4'x8'x4' boulder at the north end of a rock outcrop, bears S.46°10'W., 28.6'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY

WITNESS TO MONUMENT: ERIC GREEN

BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.

BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
SURVEYOR  
Date Received 10/28/98  
Date Filed 10/31/98  
By R. Robinson, Deputy  
File No. 125-1998R