


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

80.00 Set post 4 feet long 4 ins. in diam. 1 foot in the ground, with mound and trenches as per instruction, for cor. to secs. 2, 3, 10, and 11. No witness trees.



Description of corner evidence found:

No evidence of original monument found.

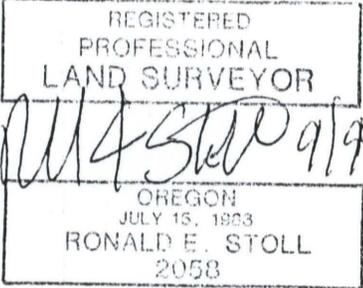

Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3/4" aluminum capped pipe, cap marked per diagram, 24" in the ground, with a mound of stone to cap, from which:

- A 1/2" rebar with aluminum cap, bears N.56°59'W., 65.50'.
- A 1/2" rebar with aluminum cap, bears S.56°51'W., 22.64'.
- A 1/2" rebar with aluminum cap, bears S.57°18'E., 27.24'.
- A 1/2" rebar with aluminum cap, bears N.56°46'E., 58.97'.

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS AND DISTANCES TAKEN TO THE CENTER OF CAP. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
CLERK
Date Received 10/28/98
Date Filed 10/31/98
By R. ROBINSON DEPUTY
File No. 131-1998R