


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.00 Set a basalt rock, 13 x 10 x 8. 4 ins. in the ground for 1/4 sec. cor. marked 1/4 on the W. side, raised mound of stone alongside, pits impractible.

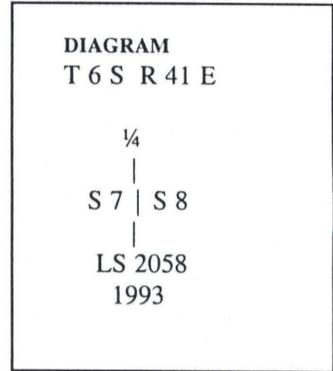

A Description of corner evidence found:

Found a mound of stone, 3' in diam., used as a fence brace at one time. Many stones of rec. size, did not find any other mounds of stone. Accepted as original corner position.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

RMA Stoll 9/98

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 15" in the ground with a mound of stone to cap, from which:

- A rebar with aluminum cap, 1/2" diam., bears N.56°43'W., 37.12', 0.2' above the ground, mkd. "RM LS 2058".
- A rebar with aluminum cap, 1/2" diam., bears S.31°08'W., 35.51', 0.2' above the ground, mkd. "RM LS 2058".
- A rebar with aluminum cap, 1/2" diam., bears S.52°29'E., 38.81', 0.2' above the ground, mkd. "RM LS 2058".
- A rebar with aluminum cap, 1/2" diam., bears N.32°13'E., 54.35', 0.2' above the ground, mkd. "RM LS 2058".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
WITNESS TO MONUMENT: DAVID SUTHERLAND
BEARINGS AND DISTANCES TAKEN TO THE CENTER OF CAP. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 19____
_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR

Date Received 10/28/98
Date Filed 10/31/98
By R. ROBINSON, Deputy
File No. 159-1998R