

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

SURVEYED BY: W.B. BARR, 1885, CONTRACT NO. 516

40.00 Set a basalt rock, 30 x 18 x 6. 24 ins. in the ground for 1/4 sec. cor. marked 1/4 on the W. side, from which:

A pine, 4 ins. diam., bears S.60°E., 7 lks. dist. mkd. 1/4 S BT.

A pine, 28 ins. diam., bears N.19°W., 40 lks. dist. mkd. 1/4 S BT.

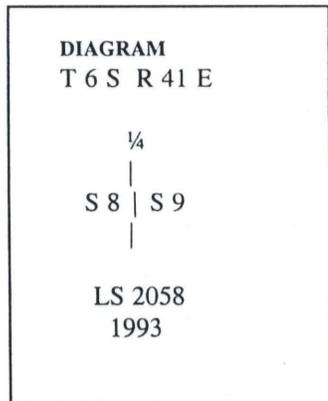

A Description of corner evidence found:

No evidence of original monument found.



Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 26" in the ground, with stone to cap, from which:

- A ponderosa pine, 16" diam., bears S.08°20'W., 34.44', scribed "1/4 S9 BT".
- A ponderosa pine, 18" diam., bears N.48°58'E., 35.24', scribed "1/4 S9 BT".
- A ponderosa pine, 12" diam., bears N.04°29'W., 77.90', scribed "1/4 S8 BT".
- A ponderosa pine, 14" diam., bears N.55°49'W., 26.26', scribed "1/4 S8 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY
 WITNESS TO MONUMENT: DAVID SUTHERLAND
 BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.
 BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of _____ County of _____
 State of _____ I hereby certify that the within instrument was filed in this office
 for record on the ____ day of _____, 19____
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR

Date Received 10/28/98
 Date Filed 10/31/98
 By R. Robinson, Deputy
 File No. 157-1998R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


G-9

History of original corner establishment:

SURVEYED BY: W.B. BAR, 1885, CONTRACT NO. 516

40.00 Set a basalt rock, 30 x 18 x 6. 24 ins. in the ground for 1/4 sec. cor. marked 1/4 on the W. side, from which:

- A pine, 4 ins. diam., bears S.60°E., 7 lks. dist. mkd. 1/4 S BT.
- A pine, 28 ins. diam., bears N.19°W., 40 lks. dist. mkd. 1/4 S BT.

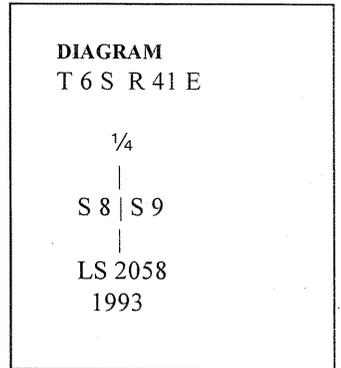

A Description of corner evidence found:

No evidence of original monument found.

Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3 1/4" aluminum capped pipe, cap marked per diagram, 26" in the ground, with stone to cap, from which:

- A pine, 16" diam., bears S.08°20'W., 34.44', scribed "1/4 S8 BT".
- A pine, 18" diam., bears N.48°58'E., 35.24', scribed "1/4 S9 BT".
- A pine, 12" diam., bears N.04°29'W., 77.90', scribed "1/4 S8 BT".
- A pine, 14" diam., bears N.55°49'W., 26.26', scribed "1/4 S8 BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY

WITNESS TO MONUMENT: DAVID SUTHERLAND

BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.

BASIS OF BEARING WAS GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

UNION COUNTY SURVEYOR

Date Received 1/4/06

Date Filed 9/9/06

By R. ROBINSON, DEPUTY

File No. 013-2006 R

REGISTERED PROFESSIONAL LAND SURVEYOR

M & Stoll 6/04

OREGON
JULY 15, 1983
RONALD E. STOLL
2058

Office of _____ County of _____
State of _____ I hereby certify that the within instrument was filed in this office
for record on the ____ day of _____, 20 ____.

(COUNTY OFFICIAL) By _____
(DEPUTY)

AZ