


Index File No. L-1 L-25 CORNER RECORD (SEARCH) Tract or Survey No. _____ Cor. E 1/4 COR. No. SEC. 13
 T 65 R. 41E R.D. UNION County UNION
 Merid. WILLAMETTE N.F. WALDWA-WHITMAN State OREGON

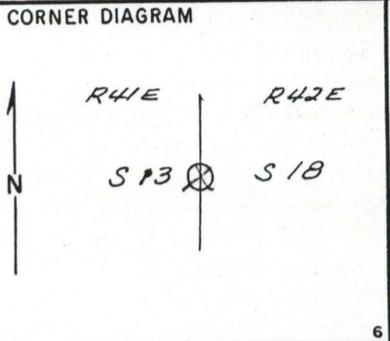

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Stone 6" x 7" x 6", on top of ground.
 fair condition marked "1/4"
 12" R.P. WITH METAL TAG.

PHOTO IDENTIFICATION DATA

Photo No. ENW. 8-101
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

Signature E.A. HOLLAND Title _____ Division _____ Headquarters _____ Date 11/21/66 7100-52 REV. 65 5

UNION COUNTY SURVEYOR


Date Received _____
 Date Filed 12-23-87
 By G. LANGLITZ, DEPUTY
 File No. 386-87R

L-1

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was originally established by J. Stone, U.S. Deputy Surveyor, under Contract No. 235, dated July 6, 1875. Surveyor General records state: Set a stone 16"X 7"X 6".

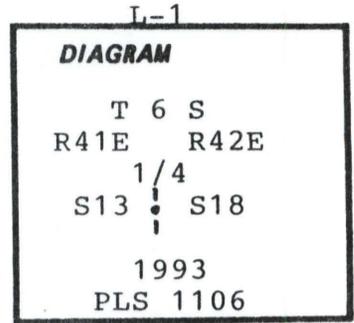

See Survey 052-1994

Description of corner evidence found:

Found a basalt stone 18"X 10"X 6" with a 1/4 chiseled on the south face, set in a mound of stone. Stone was found in a N. S. fence.

A 21" ponderosa pine bears N76 $\frac{1}{2}$ °W-21.8 feet, with open blaze but no visible scribe (axe marks).

A 14" ponderosa pine bears N45 $\frac{1}{2}$ °E-16.8 feet, with open blaze but no visible scribe (axe marks).

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2 $\frac{1}{2}$ " X 30" aluminum pipe with a 2 $\frac{1}{2}$ " aluminum cap, 26" in ground and surrounded with a mound of earth and stone. Deposited basalt stone in hole along side of monument.

Attached sign 54-9 to steel fence post, set 3.0 feet West of monument.

New bearing trees established:

- A 23" ponderosa pine bears N 61 $\frac{1}{2}$ ° W - 57.7 feet, scribed: 1/4S13BT.
- A 22" ponderosa pine bears S 41 $\frac{1}{2}$ ° W - 131.1 feet, scribed: 1/4S13BT.
- A 13" ponderosa pine bears S 39° E - 161.3 feet, scribed: 1/4S18BT.
- A 13" ponderosa pine bears N 60° E - 77.6 feet, scribed 1/4S18BT.

New bearing trees have a brass washer stamped "PLS 1106" nailed to face of blaze. Attached sign 54-3 & 54-9, painted face of blaze & a 6" red band around each bearing tree.

I hereby certify that the above corner monument was properly monumented to U.S.F.S standards by me on December 13, 1993.

Compass declination 18° East.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

William R. Wells

OREGON
 JULY 22, 1977
 WILLIAM R. WELLS
 1106
renews 12-31-94

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY
SURVEYOR

Date Received 11/3/94
 Date Filed 11/14/94
 By Guy T. Black
 File No. 147-1994R