


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

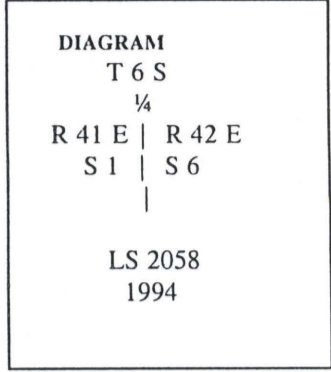

History of original corner establishment:

SURVEYED BY: J. STONE, 1875, CONTRACT NO. 235

40.00 Set a Tamarack post with mound and trench as per instruction for ¼ Sec. corner, from which a  
Fir 12 in. in diameter bears North 55° West 25 links distance  
Fir 18 in. in diameter bears North 70° East 40 links distance

Description of corner evidence found:

No evidence of original monument found.



Description of monument and accessories I established to perpetuate the original location of this corner:

At a proportionate position, set a USFS 3¼" aluminum capped pipe, cap marked per diagram, 22" in the ground, with a mound of stone to cap, 20'± easterly of a logging road, from which:

- A pine, 12" in diam., bears N.14°57'W., 23.68', scribed "¼S1BT".
- A pine, 10" in diam., bears N.75°45'E., 38.68', scribed "¼S6BT".
- A pine, 12" in diam., bears S.27°03'E., 26.76', scribed "¼S6BT".
- A pine, 8" in diam., bears S.79°01'W., 13.11', scribed "¼S1BT".

REFERENCE: RECORD OF SURVEY, LONGSHOT CADASTRAL SURVEY  
WITNESS TO MONUMENT: DAVID SUTHERLAND  
BEARINGS TAKEN TO BRASS TAG AT CENTER OF BLAZE, DISTANCES MEASURED TO BRASS TAG ON SIDE CENTER OF TREE. OBSERVED WITH ELECTRONIC TOTAL STATION AND STEEL TAPE.  
BASIS OF BEARINGS WAS A GEODETIC BEARING DETERMINED FROM GPS OBSERVATIONS.

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

RECORD COMMUNITY  
Date Received 10/28/98  
Date Filed 10/31/98  
By R. Robinson DEPUTY  
File No. 693-1978R