352 1916

RECORD OF SURVEY

197
214

Township One (1) North Range 38 E.W.M. Union County, Oregon.

CHAINS. LKS.

Survey made, April 9-10-1913, for D.L. Sanderson and Turner Oliver, Sec. 26, T.1.N.R.38 E.W.M. Cor. in place 1 1/4 x 18 road stone. The green lines on plat indicate the lines established.

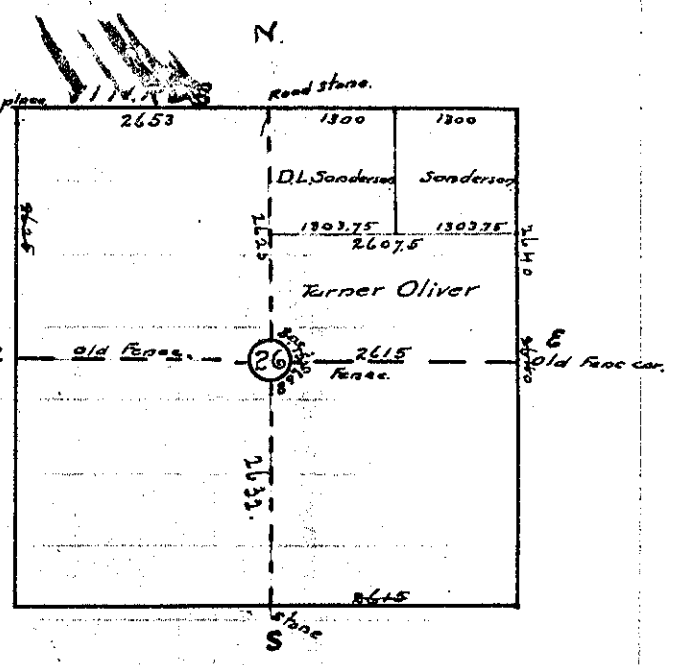

I began survey from 1/4 Cor on south boundary of sec. 26 then chained north 5257 feet to north side of said section 26. Distances to fence and center of section from south side. 2632. There were old fence lines undisputed. I then measured around the NE^4 and found the distances as shown on plat. I then chained from the N.W. cor of said sec. 26 to road stone at 1/4 cor on north side of sec. 26 and found the distance to be. 2658 3/4.

The testimony of D.L. Sanderson and John Neiderer was to the effect that the road stone, as now located was and is identical with the location as made by Arthur Curtiss C. Surveyor Union Co. at the time of location of County road, and that said road stone was located and established by carrying line West from Township line. I used said road stone as the true 1/4 Cor for North side of sec. 26. I then equally divided the N.E^4 into halves or 80 acre tracts and then equally divided the north 80 acres into 40 acres as shown on plan

C.T. Darley County Surveyor.

Recorded survey. April 19, 1913. By C.T. Darley.