


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was originally established by Rufus S. Moore under GLO contract number 451 dated June 12, 1882. Surveyor General record states:

Set basalt stone 16x14x9 ins for cor to secs 25-26-35 and 36 from which:

- A pine 40 in dia bears N48°E 39 lks dist
- A pine 15 in dia bears N48°W 12 lks dist
- A pine 5 in dia bears S60°W 56 lks dist
- A pine 40 in dia bears S60°E 65 lks dist

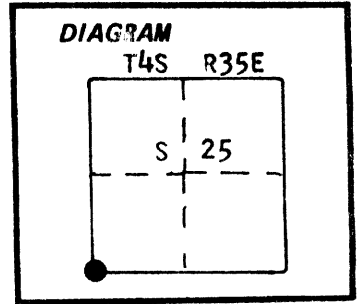

UNION COUNTY SURVEYOR

Date Received 5-5-86

Date Filed 5-5-86

By G. LANGLITZ, DEPUTY

File No. 29-86R

No record of subsequent remonumentation found

Description of corner evidence found:

- Found P.Pine stump N48°E 39 lks with faint scribes visible
- Found P.Pine stump S60°E 65 lks with blaze evident
- Found P.Pine stump S60°W 56 lks no scribes visible
- Found 20 inch diameter P.Pine N48°W 12 lks with scribing burned out and BT blaze evident. Top of tree is dead

Found stone 15x14x8 inches marked with 5 grooves in mound of stone



Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2 1/2"x30" aluminum pipe with an aluminum cap marked as shown, 28 inches in the ground. Raised mound of stone around monument from which:

New BTs


- A 19 inch diameter P.Pine bears N33°E 53.28 feet marked T4S R35E S25 BT
- A 23 inch diameter Red Fir bears S89°E 80.11 feet marked T4S R35E S36 BT
- A 10 inch diameter P.Pine bears S33°W 35.93 feet marked T4S R35E S35BT
- A 6 inch diameter P.Pine bears N4°W 35.45 feet marked X BT

Buried the original stone West and alongside of monument
Set steel fencepost approximately 5 feet North with 54-4 sign

Corner remonumented April 30, 1986
Witness; Rick Robinson

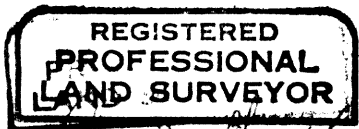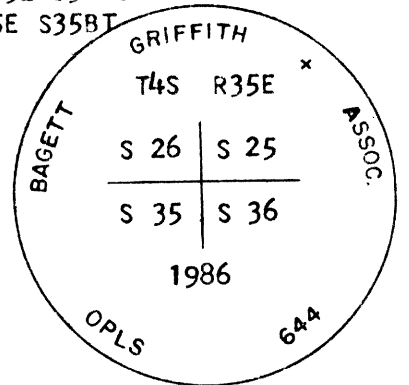

Duane I. Griffith

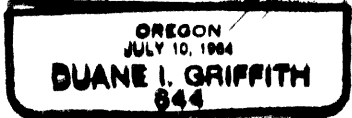

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven at the root crown on the right side of the BT. I attached a brass washer marked OPLS 644 by the BT blaze of the new BTs.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)