

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Adams & Clark, Inc.
1720 W. Fourth Ave.
Spokane, WA 99204-1702

Corner Code E-5
Township 4 South, Range 39 East

History of original corner establishment:

Original U.S. General Land Office Survey, 1863, states:

"80.00 chains Set post for corner to Sections 5, 6, 7, & 8 in mound of earth with charred stake, pits, trench, etc. as per instructions".

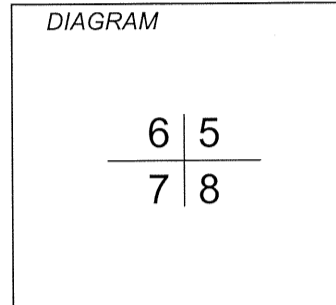

Description of corner evidence found:

Found 4"x4" stone, 1' out of ground with 5 notches on east face, 19' south of east-west fence line. GLO terrain call to "brook 5 links wide" on west line of Section 8, 1485' to south, found at 1490'. GLO terrain call to "road" on west line of section 5, 2392.5' north", found at 2389'.

Accepted this stone as Section corner.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced stone with 5/8"x36" rebar with 1-1/2" aluminum cap marked as shown below. Set found stone alongside.

Accessories:

Set 5/8"x24" rebar with yellow plastic cap marked "RP LS 1503"
N54°13'24"E 32.51' under fence
S61°00'04"E 34.95'
S55°17'58"W 33.02'
N60°38'16"W 37.23' under fence

UNION COUNTY
SURVEYOR

Date Received 12/22/15

Date Filed 12/22/15

By [Signature]

201-2015R


Accessory ties were made with electronic total station theodolite, and steel tape.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]

OREGON
JANUARY 18, 1974
LESLIE D. KILLINGSWORTH
1503

RENEWAL DATE 6/22/03

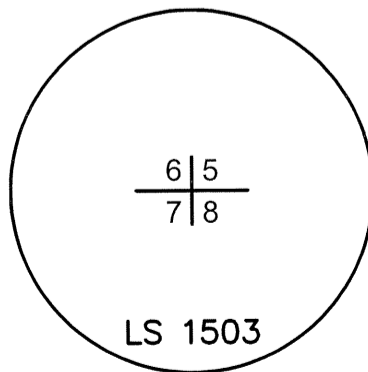

11/07/2002

Leslie D. Killingsworth, P.L.S. 1503

Date