


Township 7 South Range 46 East W. M., Union County, Oregon.

CHAINS. LKS.

Rob. Mills Geo. Brown Motly Jack Morrison & E. Steelsman Nov. 6th 1889

I commenced at the corner
To Sec 30=31=25 & 36 on Range
Line bet Ranges 45 & 46 East
thence East bet Sec 30 & 31
thence East bet Var 20° E

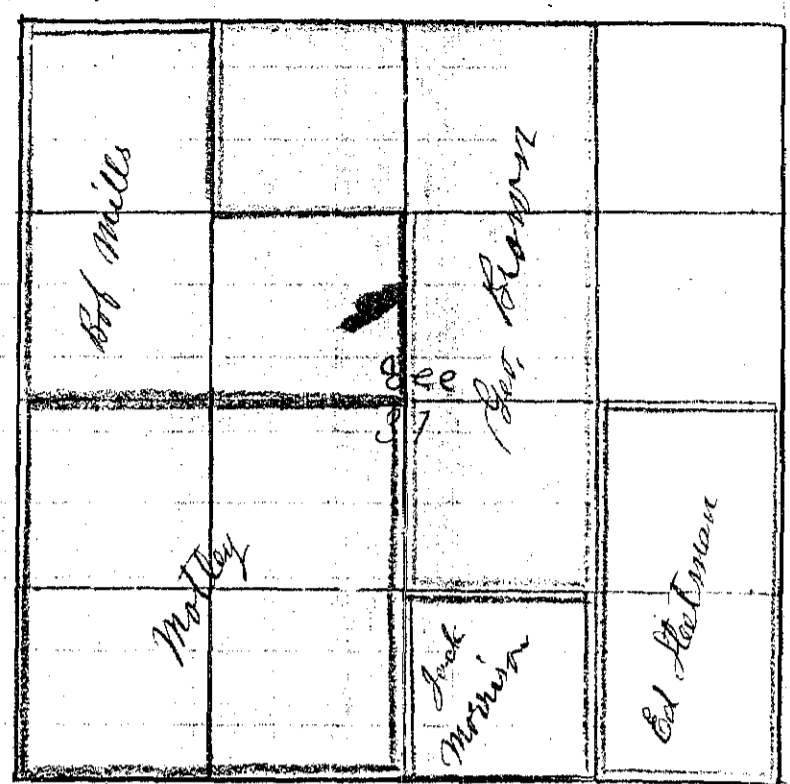

- 19 20 Set Temporary 1/8 corner
- 39 20 Set Temporary 1/4 Sec corner
- 59 20 Set Temporary 1/8 corner
- 78 14 Intersect 31 lks North of
The corner To Sec 29=30=31 & 32

from which

- a Pine 12 inches dia. frs N 1° W 110 lks dist
- " 15 " " " S 19° W 200 " "
- " 10 " " " S 14° E 238 " "

thence N 89° 47' W on True line

- 20 00 Set Stone 7 x 8 x 20 for 1/8 corner
from which

a Cottonwood 5 inch dia. frs N 15° W 16 lks dist

- 40 00 Set Stone 8 x 9 x 20 for 1/4 Sec corner bet Sec 30 & 31
from which

a Cottonwood 3 inches dia frs S W 2 lks dist

- 60 00 Set Stone 14 x 14 x 24 for 1/8 corner

- 78 14 The corner To Sec 30=31=25 & 36

The 1/4 Sec corner bet Sec 6 & 31 which is
a Pine Stump 18 inch dia. Marked 1/4 S. T. U.S. Survey
from which

a Pine 23 inches dia frs N 47 1/2° W 44 lks dist.

thence North through Sec 31

Var 20° 30' E

- 20 00 Set Temporary 1/6 cor,
- 40 00 Set Temporary center Sec 31
- 60 00 Set Temporary 1/6 corner
- 80 60 Intersect 38 lks East of the 1/4 Sec cor bet Sec 30 & 31
thence S 16° E through 31
- 20 13 Set Stone 8 x 8 x 17 for 1/6 corner in center N 1/2 Sec 31
- 40 26 Set Stone 10 x 11 x 20 for center Sec 31
- 60 42 Set Stone 14 x 18 x 18 for 1/6 corner in center S 1/2 Sec 31
- 80 60 The 1/4 Sec cor bet Sec 6 & 31 on 1/2 Sec bet 7 & 31 South